

(19) World Intellectual Property Organization  
International Bureau




(43) International Publication Date  
27 February 2003 (27.02.2003)

PCT

(10) International Publication Number  
WO 03/017541 A1

- (51) International Patent Classification<sup>7</sup>: H04J 1/16, H04L 12/54, 12/56
- (21) International Application Number: PCT/US02/25425
- (22) International Filing Date: 9 August 2002 (09.08.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
09/930,804 15 August 2001 (15.08.2001) US
- (71) Applicant: INTERNET MACHINES CORPORATION  
[US/US]; 305 Agoura Road, Suite 203, Agoura Hills, CA 91301 (US).
- (72) Inventor: HAYWOOD, Chris; 1429 Pleasant Oaks Place, Thousand Oaks, CA 91362 (US).
- (74) Agent: WRIGHT, Jerry, G.; Coudert Brothers LLP, 600 Beach Street, 3rd Floor, San Francisco, CA 94109 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— with international search report  
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: VARIABLE SIZE FIRST IN FIRST OUT (FIFO) MEMORY WITH HEAD AND TAIL CACHING

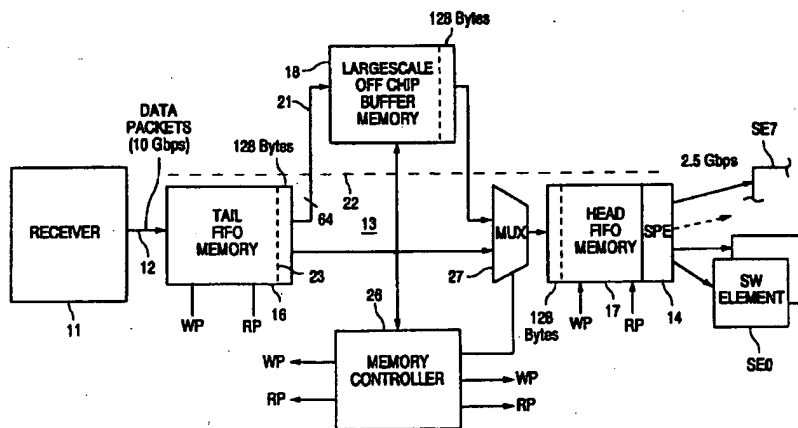

(57) Abstract: A variable size FIFO memory (13) is provided by the use of head (17) and tail (16) FIFO memories operating at a very high data rate and then an off chip buffer memory (18), for example, of a dynamic RAM type, which temporarily stores data packets when both head (17) and tail (16) FIFO memories are filled. Data blocks of each of the memories are the same size for efficient transfer of data. After a sudden data burst which causes memory overflow ceases, the head (17) and tail (16) FIFO memories return to the initial functions with the head memory directly receiving high speed data and transmitting it to various switching elements and the tails (16) FIFO memory stores temporary overflows of data from the head (17) FIFO memory.

BEST AVAILABLE COPY

WO 03/017541 A1

## **VARIABLE SIZE FIRST IN FIRST OUT (FIFO) MEMORY WITH HEAD AND TAIL CACHING**

The present invention is structured to a variable size First In First Out (FIFO)  
5 memory with head and tail caching.

### **BACKGROUND OF THE INVENTION**

Communications networks now require handling of data at very high serial  
10 data rates. For example, 10 gigabits per second (Gbps) is common. When it is  
required to process at these speeds, high speed data parallel connections are used to  
increase the effective bandwidth. This may be unsatisfactory because of the resultant  
decrease in bandwidth due to increased overhead requirements. There is a need for  
effective high speed switching apparatus and the associated hardware to support such  
15 a apparatus.

### **OBJECT AND SUMMARY OF INVENTION**

It is therefore an object of the present invention to provide a variable size  
20 First In First Out (FIFO) memory.

In accordance with the above object, there is provided a variable size first in  
first out (FIFO) memory comprising a head FIFO memory for sequentially delivering  
data packets at a relatively slow rate to a plurality of switching elements whereby  
25 some latency occurs between data packets. A tail FIFO memory stores an overflow  
of the data packets from the head memory. Both the head and tail memories operate  
at a relatively high data rate equivalent to the data rate of incoming data packets. A  
large capacity buffer memory is provided having an effectively lower clock rate than  
the FIFO memories for temporarily storing data overflow from the tail memory  
30 whereby the FIFO memories in combination with the buffer memory form a variable  
size FIFO memory.

## BRIEF DESCRIPTION OF DRAWINGS

Fig. 1 is a block diagram of a memory embodying the present invention.

Fig. 2 is a diagrammatic portion of Fig. 1 illustrating its operation.

5 Fig. 3 is a flow chart of the operation of Fig. 1.

## DETAILED DESCRIPTION OF PREFERRED EMBODIMENT

As disclosed in a co-pending application entitled *High Speed Channels Using*  
10 *Multiple Parallel Lower Speed Channels* attorney docket 0679/13 switching of input data arriving at a relatively high data rate of, for example 10 Gbps, may be accomplished. As illustrated in Fig. 1 a plurality of switching elements SE0-SE7 which operate at a much lower data rate, for example 2.5 Gbps. By the use of a sequential or successive sprinkling technique for complete data packets a high data  
15 rate may be maintained. Data packets arrive from a receiver 11 which would have a communications processor coupled to it on line 12 at 10 Gbps and via the variable FIFO memory illustrated at 13, FIFO being First In First Out memory. Data packets are routed to a sequential sprinkler engine 14 and then distributed at the lower data rate to various switching elements. In general, a variable FIFO memory is required  
20 where a sudden burst of input data may occur which would temporarily overwhelm an individual FIFO memory without a large scale buffer memory (which it can be assumed has almost unlimited memory capacity since it is remote or off the same semiconductor chip as the high speed memory).

25 Fig. 2 illustrates where some latency may occur, in other words, there would not be a continuous serial transmission of the high speed data packets through to the switch elements. Thus the data packets 1, 2, 3 are indicated in a line of data being received. The first data packet is routed to the switching element 7. After this operation is started, a short time later is indicated by the time lapse  $t_1$  data packet  
30 two is distributed by the sprinkler engine; and then data packet three at a later time  $t_2$ . Some latency occurs which must be compensated for by some type of buffer apparatus.

This is provided by the overall variable FIFO memory which is a combination of a tail FIFO memory 16, a head FIFO memory 17 and the large scale off chip buffer memory 18. Variable blocks of data are formed by a receiver 11 and transferred through the tail FIFO memory to the head FIFO memory 17 until it is filled. Thus, the tail or FIFO 16 routes data to the head FIFO memory 17 which then distributes data packets to the various switching elements. If the head FIFO memory becomes full, the tail FIFO memory will start filling. The tail FIFO will buffer enough data to keep the head FIFO filled. If the tail FIFO fills due to a sudden burst, data is then written on the line of 21 to the large scale off chip memory 18. This data will be read from the large scale memory into the head FIFO when the head FIFO starts to empty.

From a practical standpoint to operate at the data rate of 10 Gbps, tail FIFO 16 and head FIFO 17 are located on a common semiconductor substrate or chip with the large scale buffer memory 18 being remotely located off chip. This is indicated by the dash line 22. When the tail FIFO memory becomes full then the large scale off chip buffer memory 18 is utilized. Uniform blocks of data are stored indicated by the dash line 23. For example, 128 bytes is transferred on the line 21 into the memory 18. This memory also includes a similar block size of 128 bytes. For example, line 21 may have a 64 bit width (meaning eight bytes) and thus, the data block of 128 bytes is transferred in 16 clock cycles ( $16 \times 64 = 128$  bytes). Optimization of the bus width in all of the FIFO and buffer memories provide, in effect, a 100 percent efficient transfer technique since for every clock cycle a maximum number of bits is transferred. However buffer memory 18 has a lower clock rate and therefore wider bus. In the present application this could be two read and two write cycles. The various write pointers and read pointers (WP and RP) are so indicated on the various memories and the overall control is accomplished by the memory controller 26. A multiplexer 27 connected to memory controller 26 provides for control of the various data routings. When a sudden burst of data packets ceases, the FIFO memory can then return to its ordinary mode of operation where the head FIFO memory 17 contains all of the inputted data packets as delivered by the tail FIFO memory. Of course, this doesn't occur until the large scale off chip buffer memory 18 is unloaded.

The foregoing operation is shown in a flow chart of Fig. 3. In step 41 the head FIFO memory is filled, and in step 42 if the head FIFO overflows, the tail FIFO memory is filled. Then in step 43 again when the tail FIFO is filled, data is stored in the buffer memory until the head FIFO begins to empty. In general, memory  
5 controller 26 monitors the FIFO depth and determines if a block of data needs to be stored to off chip memory. It also keeps track of how many blocks are written. As the FIFO memories empty, the memory controller is responsible for arbitrating and retrieving any stored blocks of data.

10 The larger external buffer memory 18 can be provisioned, using one of many allocation schemes, to support multiple head and tail FIFOs in the same manner as described.

Thus a variable FIFO memory with head and tail caching has been provided.  
15

## CLAIMS:

1. A variable size first in first out (FIFO) memory comprising:
  - 5 a head FIFO memory for sequentially delivering data packets at a relatively slow rate to a plurality of switching elements whereby some latency occurs between data packets:
  - a tail FIFO memory for storing an overflow of said data packets from said head memory; both said head and tail memories operating at a relatively high data rate equivalent to the rate of incoming data packets;
  - 10 a large capacity buffer memory having an effectively lower clock rate than said FIFO memories for temporarily storing data overflow from said tail memory whereby said FIFO memories in combination with said buffer memory for a variable size FIFO memory.
- 15 2. A memory as in claim 1 where said head and tail memories have data blocks of a predetermined and same size and said buffer memory has the same size data block whereby high efficiency data transfer between memories is obtained.
- 20 3. A memory as in claim 1 where FIFO memories reside on a common semiconductor substrate and said buffer memory is remote.
4. A memory as in Claim 1 where said buffer memory has a wider bus than said head and tail FIFO memories.

1/2

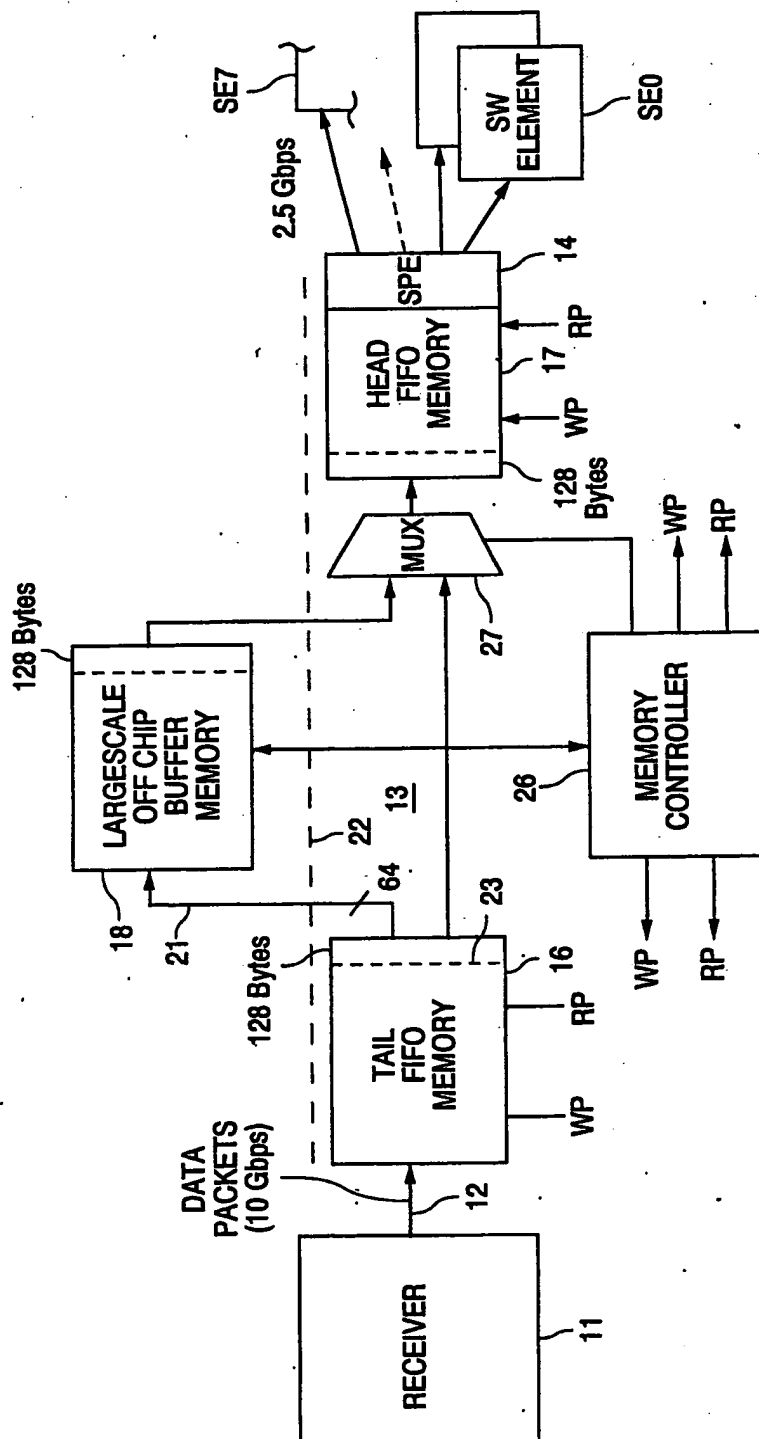


FIG. 1

2/2

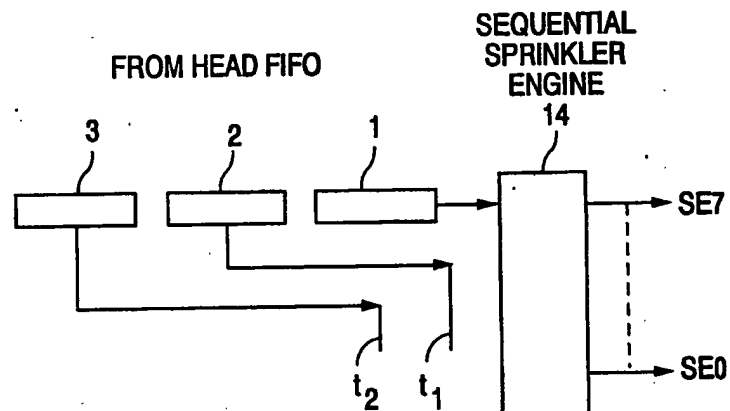


FIG. 2

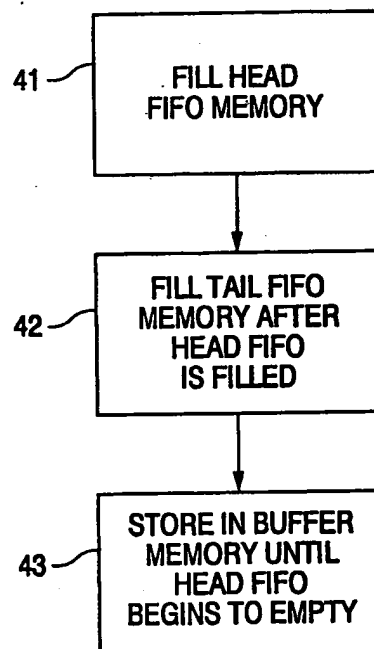


FIG. 3



# INTERNATIONAL SEARCH REPORT

International application No.

PCT/US02/25425

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : H04J 1/16; H04L 12/54, 12/56  
US CL : 370/231, 232, 253, 395.7, 412, 429

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
U.S. : 370/231, 232, 253, 395.7, 412, 429

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
EAST Database

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 6,122,674 A (OLNOWICH) 19 September 2000 (19.09.2000), see the entire document.	1-4
Y	US 5,982,749 A (DANIEL et al) 09 November 1999 (09.11.1999), see the entire document.	1-4
A	US 4,394,725 A (BIENVENU et al) 19 July 1983 (19.07.1983), see the entire document.	1-4

☐ Further documents are listed in the continuation of Box C.

☐ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T"

later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X"

document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y"

document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"Z"

document member of the same patent family

Date of the actual completion of the international search

26 September 2002 (26.09.2002)

Date of mailing of the international search report

19 DEC 2002

Name and mailing address of the ISA/US

Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Facsimile No. (703)305-3230

Authorized officer

Toan Nguyen

Telephone No. 703-305-9600

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**